


MAX-FAN 200 - 910 - 3 SPEED

TECHNICAL DATASHEET

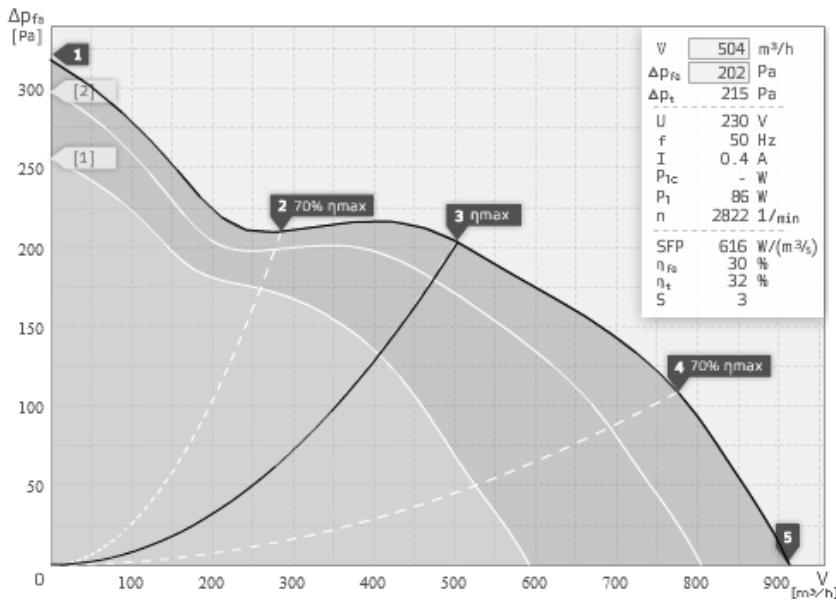

- Diagonal impeller with stator
- Plastic housing
- 3-step or speed controllable
- Integrated thermal switch
- Including mounting bracket

Operating Point		1	2	3	4	5
Current I	A	0,3	0,3	0,4	0,5	0,5
Power Consumption P1	W	75	74	86	102	109
RPM n	1/min	2868	2874	2823	2755	2724
SPL inlet LWA5	dB(A)	73	73	72	72	73
SPL outlet LWA6	dB(A)	76	76	75	77	77
SPL casing break out LWA2	dB(A)	64	62	61	61	63

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	72	41	53	59	66	69	65	61	52
Outlet	LWA6	75	41	47	59	64	72	71	63	54
Casing	LWA2	60	37	35	51	51	56	57	47	36

EL 200 E2M 01 122239	
Voltage UN	230 V 1~
Current Imax	0,5
Ambient Temperature tA	60 °C
Medium Temperature tM	60 °C
Speed Control	3-2-1
Motor Protection	TAI
Isolation Class	F
Weight	3,2 kg

