


MAX-FAN 250 - 1710 - 3 SPEED

TECHNICAL DATASHEET

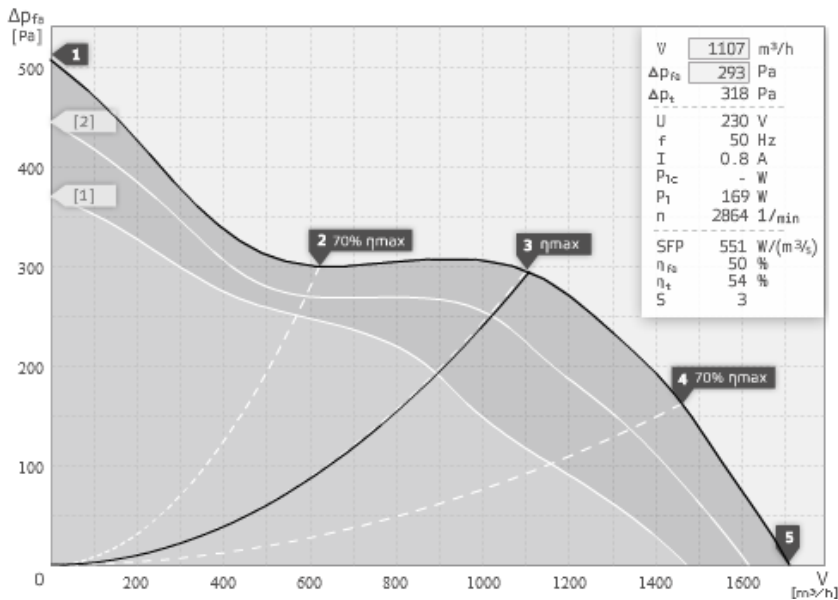

- Diagonal impeller with stator
- Galvanized metal housing
- 3-step or speed controllable
- Integrated thermal switch
- Including mounting bracket

Operating Point		1	2	3	4	5
Current I	A	0,7	0,7	0,8	0,8	0,7
Power Consumption P1	W	159	139	169	174	158
RPM n	1/min	2879	2918	2865	2860	2885
SPL inlet LWA5	dB(A)	-	-	-	-	-
SPL outlet LWA6	dB(A)	-	-	-	-	-
SPL casing break out LWA2	dB(A)	-	-	-	-	-

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	-	-	-	-	-	-	-	-	-
Outlet	LWA6	-	-	-	-	-	-	-	-	-
Casing	LWA2	-	-	-	-	-	-	-	-	-

EL 250 E2M 01 | 122238

Voltage UN	230 V 1~
Current Imax	0,8
Ambient Temperature tA	50 °C
Medium Temperature tM	50 °C
Speed Control	3-2-1
Motor Protection	TAI
Isolation Class	F
Weight	7,1 kg

