


MAX-FAN 250 - 1625

TECHNICAL DATASHEET

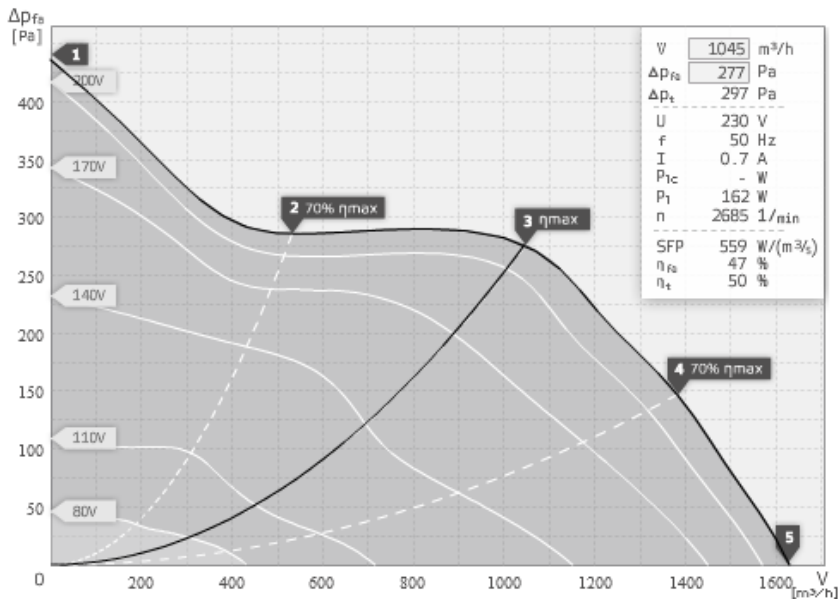

- Diagonal impeller with stator
- Galvanized metal housing
- Speed controllable
- Integrated thermal switch
- Including mounting bracket

Operating Point		1	2	3	4	5
Current I	A	0,6	0,6	0,7	0,7	0,7
Power Consumption P1	W	143	123	162	162	148
RPM n	1/min	2738	2809	2684	2688	2726
SPL inlet LWA5	dB(A)	76	74	70	72	74
SPL outlet LWA6	dB(A)	80	78	74	75	77
SPL casing break out LWA2	dB(A)	58	57	49	51	53

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	70	-	36	47	57	63	66	67	56
Outlet	LWA6	73	-	41	57	63	69	69	65	54
Casing	LWA2	49	-	36	35	34	45	44	41	35

EL 250 E2 06 | 116227

Voltage UN	230 V 1~
Current Imax	0,8
Ambient Temperature tA	50 °C
Medium Temperature tM	50 °C
Speed Control	V
Motor Protection	TMI
Isolation Class	F
Weight	5,4 kg

