




# Q-Max EC 150 - 716 m<sup>3</sup>/h

## TECHNICAL DATASHEET

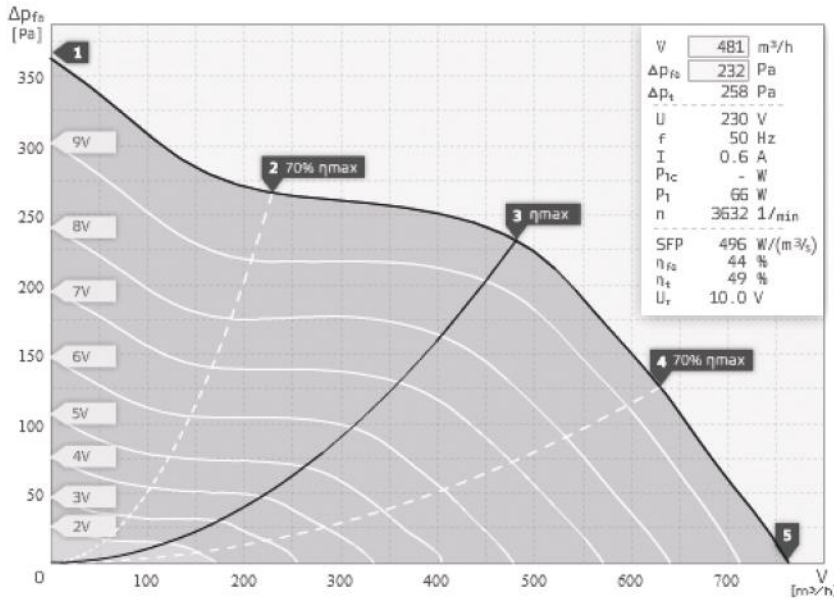

- with integrated diagonal fan ETAMASTER
- Sound insulated metal casing
- EC-motor
- Variable speed control
- Integrated electronic

Operating Point		1	2	3	4	5
Current I	A	0,5	0,5	0,6	0,6	0,5
Power Consumption P1	W	55	52	66	67	62
RPM n	1/min	3740	3758	3632	3611	3632
SPL inlet LWA5	dB(A)	-	-	-	-	-
SPL outlet LWA6	dB(A)	63	63	65	67	68
SPL casing break out LWA2	dB(A)	51	50	52	54	55

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	-	-	-	-	-	-	-	-	-
Outlet	LWA6	65	36	46	59	63	56	47	46	38
Casing	LWA2	52	41	34	40	50	45	40	34	32

Q-Max EC 160, 746   132174	
Voltage UN	230 V 1~
Current Imax	0,6
Ambient Temperature tA	40 °C
Medium Temperature tM	40 °C
Speed Control	0-10V
Motor Protection	TEC
Isolation Class	F
Weight	0 kg

