




# Q-Max EC 315 - 2850 m<sup>3</sup>/h

## TECHNICAL DATASHEET

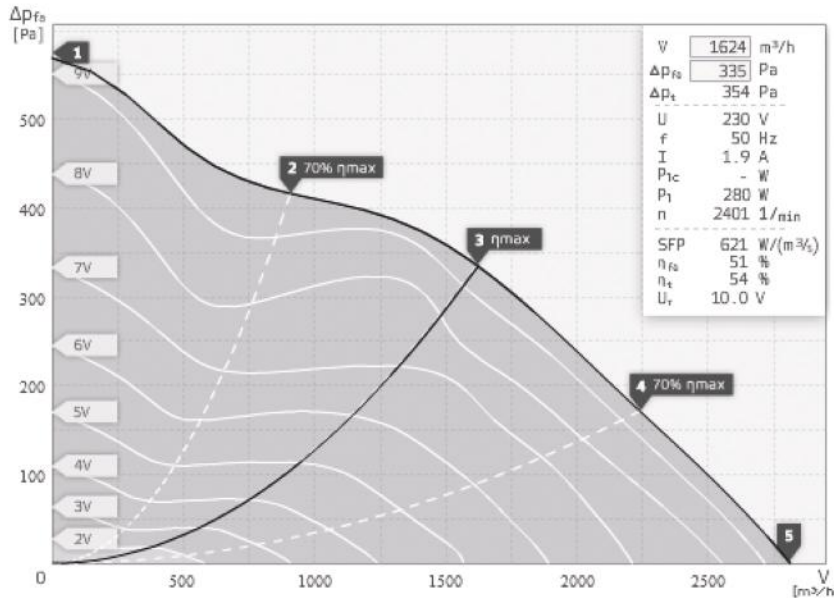

- with integrated diagonal fan ETAMASTER
- Sound insulated metal casing
- EC-motor
- Variable speed control
- Integrated electronic

Operating Point		1	2	3	4	5
Current I	A	1,9	1,9	1,9	1,9	1,9
Power Consumption P1	W	280	282	281	280	284
RPM n	1/min	2632	2795	2402	2411	2543
SPL inlet LWA5	dB(A)	76	75	76	75	77
SPL outlet LWA6	dB(A)	77	76	76	76	81
SPL casing break out LWA2	dB(A)	62	64	59	57	59

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	75	47	53	72	69	68	66	65	56
Outlet	LWA6	76	37	53	71	72	71	60	59	51
Casing	LWA2	58	41	40	49	51	57	44	40	31

Q-Max EC 315, 2850   132224	
Voltage UN	230 V 1~
Current Imax	2
Ambient Temperature tA	40 °C
Medium Temperature tM	40 °C
Speed Control	0-10V
Motor Protection	TEC
Isolation Class	F
Weight	0 kg

