


# ISOMAX 250 - 2310

## TECHNICAL DATASHEET

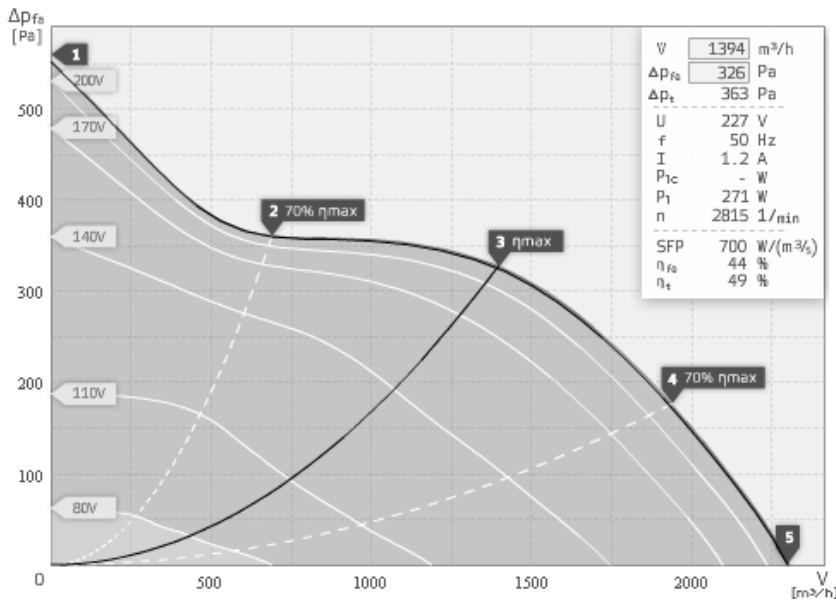

- ETALINE sound insulated
- Galvanized metal housing
- Speed controllable
- Integrated thermal switch
- With mounting brackets for hanging

Operating Point		1	2	3	4	5
Current I	A	1,2	1	1,2	1,3	1,2
Power Consumption P1	W	257	213	273	289	281
RPM n	1/min	2837	2879	2821	2814	2826
SPL inlet LWA5	dB(A)	73	73	73	74	77
SPL outlet LWA6	dB(A)	75	75	75	76	79
SPL casing break out LWA2	dB(A)	61	59	58	59	62

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	72	40	52	67	67	65	64	63	54
Outlet	LWA6	75	42	52	71	70	69	61	61	52
Casing	LWA2	57	39	38	46	51	55	50	43	32

ELIX 250 E2 02   121556	
Voltage UN	230 V 1~
Current Imax	1,7
Ambient Temperature tA	55 °C
Medium Temperature tM	55 °C
Speed Control	V
Motor Protection	TMI
Isolation Class	F
Weight	13,4 kg

