


# MAX-FAN 160 - 430 - 3 SPEED

## TECHNICAL DATASHEET

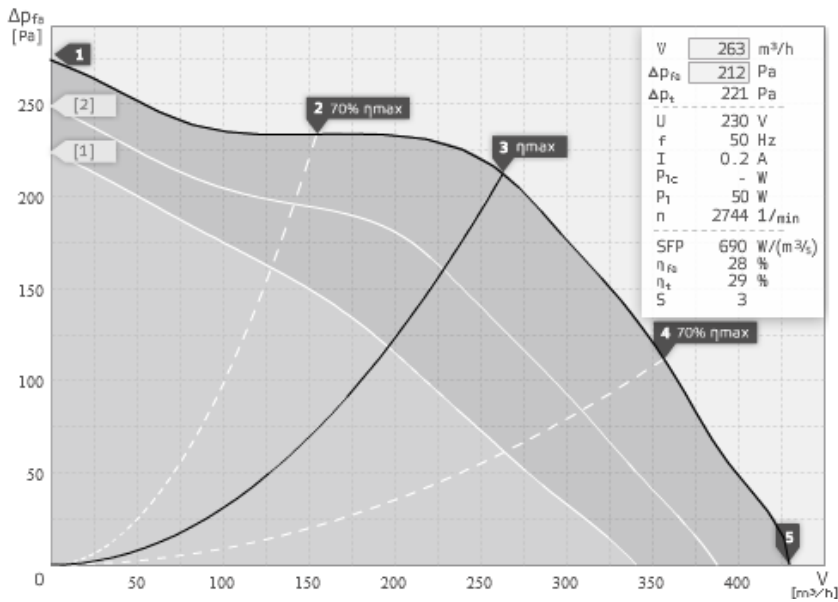

- Diagonal impeller with stator
- Plastic housing
- 3-step or speed controllable
- Integrated thermal switch
- Including mounting bracket

Operating Point		1	2	3	4	5
Current I	A	0,2	0,2	0,2	0,2	0,2
Power Consumption P1	W	44	47	50	51	49
RPM n	1/min	2839	2796	2744	2744	2775
SPL inlet LWA5	dB(A)	64	68	64	65	68
SPL outlet LWA6	dB(A)	68	73	66	67	70
SPL casing break out LWA2	dB(A)	54	57	54	55	58

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	64	37	39	49	58	60	58	55	44
Outlet	LWA6	66	35	38	47	58	62	60	56	46
Casing	LWA2	53	34	30	39	48	47	50	44	31

EL 160 E2M 01 | 121746

Voltage UN	230 V 1~
Current Imax	0,2
Ambient Temperature tA	80 °C
Medium Temperature tM	80 °C
Speed Control	3-2-1
Motor Protection	TAI
Isolation Class	F
Weight	2,2 kg

