




Q-Max 250 - 1590 m³/h

TECHNICAL DATASHEET

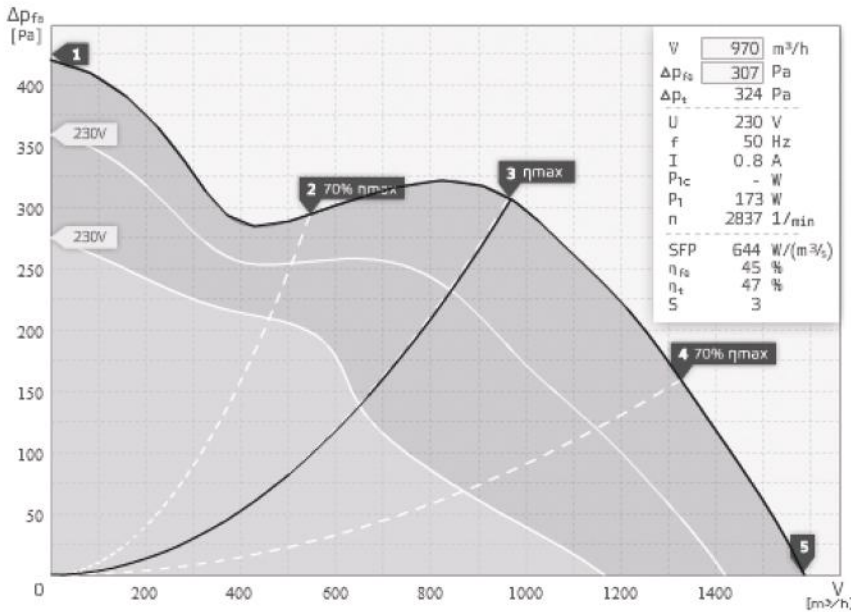

- with integrated diagonal fan ETAMASTER
- Sound insulated metal casing
- With 3-step switch
- Integrated thermal switch

Operating Point		1	2	3	4	5
Current I	A	0,7	0,7	0,8	0,8	0,8
Power Consumption P1	W	146	139	173	177	169
RPM n	1/min	2875	2883	2834	2836	2853
SPL inlet LWA5	dB(A)	71	70	69	70	72
SPL outlet LWA6	dB(A)	71	70	69	72	74
SPL casing break out LWA2	dB(A)	54	55	54	52	53

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	68	53	60	64	63	59	56	55	46
Outlet	LWA6	69	54	62	64	65	62	51	48	43
Casing	LWA2	53	48	46	47	44	42	40	35	27

Q-Max AC 250, 1590, 3 speed 132191	
Voltage UN	230 V 1~
Current I _{max}	0,9
Ambient Temperature t _A	40 °C
Medium Temperature t _M	40 °C
Speed Control	3-2-1
Motor Protection	TAI
Isolation Class	F
Weight	0 kg

