




Q-Max 315 - 3015 m³/h

TECHNICAL DATASHEET

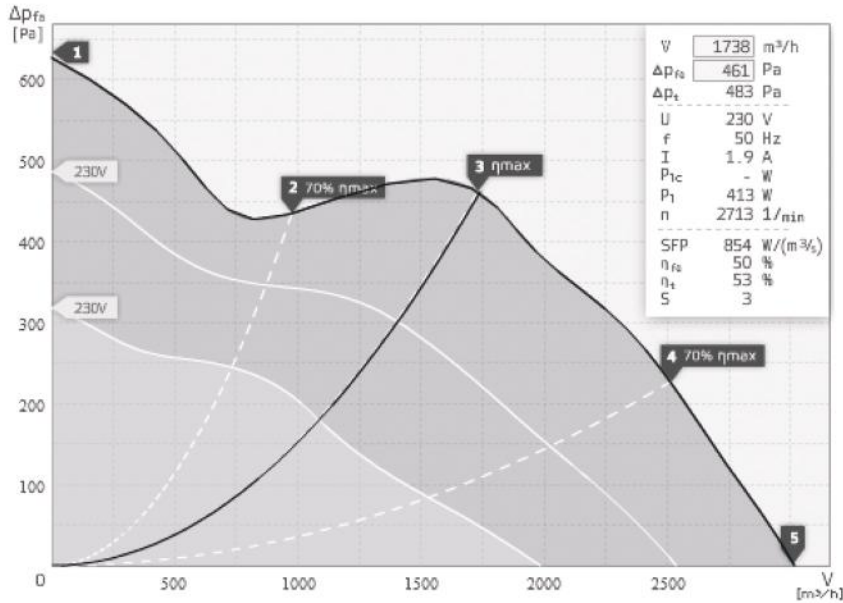

- with integrated diagonal fan ETAMASTER
- Sound insulated metal casing
- With 3-step switch
- Integrated thermal switch

Operating Point		1	2	3	4	5
Current I	A	1,6	1,5	1,9	1,9	1,8
Power Consumption P1	W	350	323	412	421	379
RPM n	1/min	2782	2797	2714	2707	2744
SPL inlet LWA5	dB(A)	78	76	76	77	79
SPL outlet LWA6	dB(A)	78	77	77	78	79
SPL casing break out LWA2	dB(A)	62	62	61	59	60

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	75	52	60	71	70	66	67	65	56
Outlet	LWA6	76	55	64	70	72	70	61	59	51
Casing	LWA2	60	50	50	56	51	52	48	47	37

Q-Max AC 315, 3015, 3 speed 132260	
Voltage UN	230 V 1~
Current I _{max}	2
Ambient Temperature t _A	40 °C
Medium Temperature t _M	40 °C
Speed Control	3-2-1
Motor Protection	TAI
Isolation Class	F
Weight	0 kg

