




# Q-Max 400 - 3240 m<sup>3</sup>/h

## TECHNICAL DATASHEET

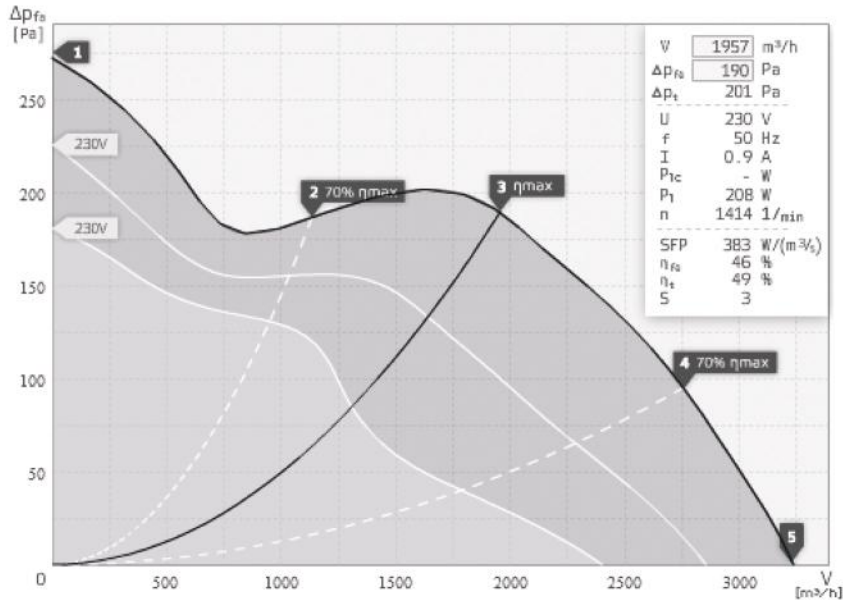

- with integrated diagonal fan ETAMASTER
- Sound insulated metal casing
- With 3-step switch
- Integrated thermal switch

Operating Point		1	2	3	4	5
Current I	A	0,8	0,8	0,9	0,9	0,9
Power Consumption P1	W	180	176	208	210	194
RPM n	1/min	1431	1435	1414	1417	1427
SPL inlet LWA5	dB(A)	70	68	68	69	69
SPL outlet LWA6	dB(A)	70	68	67	69	70
SPL casing break out LWA2	dB(A)	56	55	56	51	53

Sound power (LW) dB(A)		Medium Frequency Band								
		$\Sigma$	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	67	44	55	62	62	60	60	55	47
Outlet	LWA6	66	50	55	60	63	60	52	46	40
Casing	LWA2	57	56	50	44	47	47	35	28	20

Q-Max AC 400, 3240, 3 speed   132281	
Voltage UN	230 V 1~
Current I <sub>max</sub>	1
Ambient Temperature t <sub>A</sub>	40 °C
Medium Temperature t <sub>M</sub>	40 °C
Speed Control	3-2-1
Motor Protection	TAI
Isolation Class	F
Weight	0 kg

