


MAX-FAN 125 - 360 - 3 SPEED

TECHNICAL DATASHEET

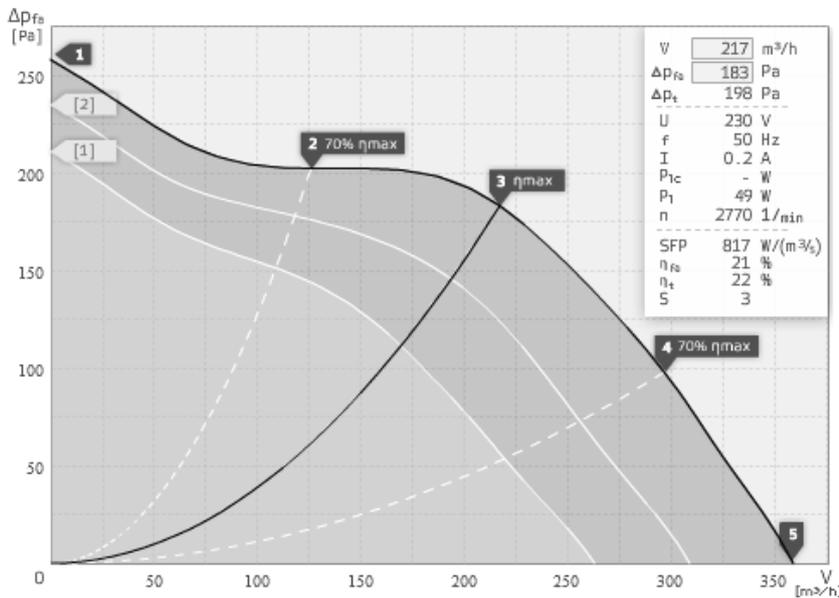

- Diagonal impeller with stator
- Plastic housing
- 3-step or speed controllable
- Integrated thermal switch
- Including mounting bracket

Operating Point		1	2	3	4	5
Current I	A	0,2	0,2	0,2	0,2	0,2
Power Consumption P1	W	44	45	49	52	52
RPM n	1/min	2840	2821	2770	2743	2740
SPL inlet LWA5	dB(A)	69	67	67	66	67
SPL outlet LWA6	dB(A)	70	68	67	66	66
SPL casing break out LWA2	dB(A)	59	57	56	55	55

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	66	35	46	49	60	63	60	57	47
Outlet	LWA6	67	32	46	51	59	64	60	57	47
Casing	LWA2	56	28	36	38	45	53	52	46	32

EL 125 E2M 01 | 122230

Voltage UN	230 V 1~
Current Imax	0,2
Ambient Temperature tA	80 °C
Medium Temperature tM	80 °C
Speed Control	3-2-1
Motor Protection	TAI
Isolation Class	F
Weight	2,4 kg

