


RK 150 LS - 800 m³/h

TECHNICAL DATASHEET

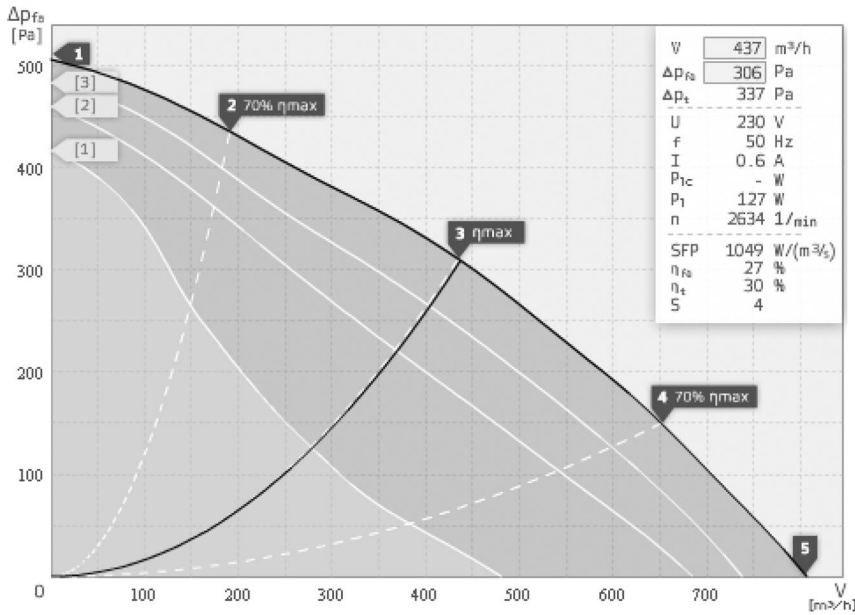

- Backward curved centrifugal fan
- Plastic housing PA6, RAL 7035
- Switch with 4-speed
- Speed controllable
- Integrated thermal switch

Operating Point		1	2	3	4	5
Current I	A	0,5	0,5	0,6	0,6	0,6
Power Consumption P1	W	100	113	127	131	127
RPM n	1/min	2809	2728	2634	2611	2638
SPL inlet LWA5	dB(A)	-	-	-	-	-
SPL outlet LWA6	dB(A)	-	-	-	-	-
SPL casing break out LWA2	dB(A)	-	-	-	-	-

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	-	-	-	-	-	-	-	-	-
Outlet	LWA6	-	-	-	-	-	-	-	-	-
Casing	LWA2	-	-	-	-	-	-	-	-	-

RK 150 LS 105802	
Voltage UN	230 V 1~
Current I _{max}	0,6
Ambient Temperature t _A	40 °C
Medium Temperature t _M	40 °C
Speed Control	4-3-2-1
Motor Protection	TAI
Isolation Class	F
Weight	3,6 kg

